
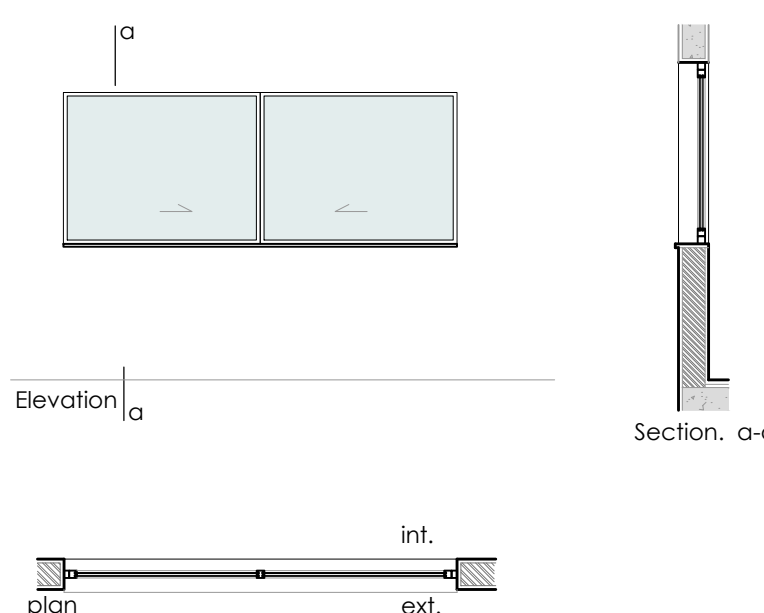



COLOR	RED	YELLOW	GREEN	CYAN	BLUE
PEN	?	?	?	?	?
WIDTH	0.30	0.35	0.5	0.38	0.70
MAKEN	?	8	30	366	255
	?	?	30	366	255
	0.25	0.49	0.30	0.38	0.38

JA02	1 Piece	
<div></div>		
LOCATION	Bank.	
DIMENSIONS	2.60x1.20m window.	
DESCRIPTION	Double-glazed sliding sash window with 2.8mm thick UPVC/PVC frame and profiles.	
MATERIAL	FRAME	Movable and fixed frame in PVC and STEEL with a minimum thickness of 2.8mm.
	GLASS	Smoked clear tempered double glass with 6+12+6mm thickness. argon gas inside. UV transmission $\leq 20\%$, heat transfer coefficient $U_g \leq 0.60 \text{ W/m}^2\text{K}$.
FINISHING		Smooth finish in white color.
THRESHOLD/SILL		In cement mortar at a line of 1: 2.5 with 30mm thickness, executed on site.
	HINGES	According to the specified series.
IRONWARE	LOCK	According to the specified series.
	HANDLES	According to the specified series.
OBSERVATIONS		All dimensions must be verified on site.


JAO3	1 Piece
------	---------

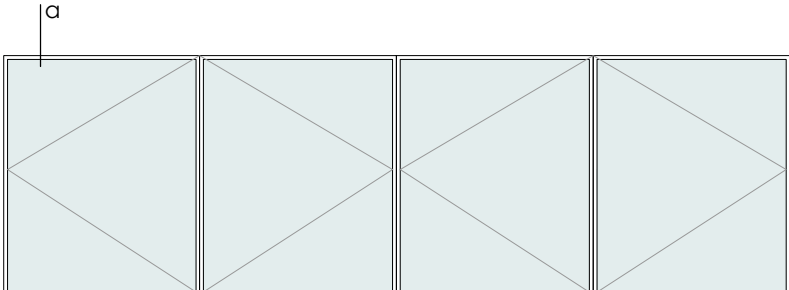

Elevation



Section. α-α

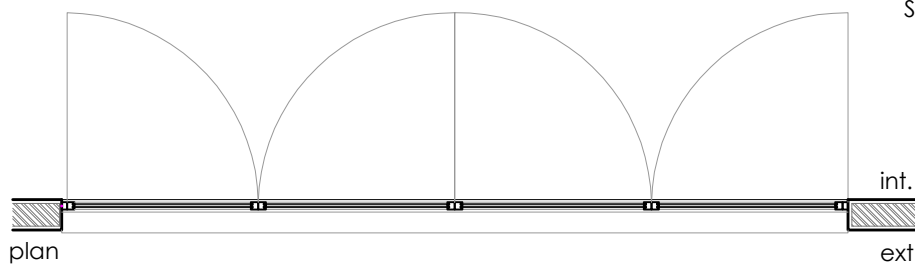

plan

int.

ext.

LOCATION	Coffe and Restaurant.	
DIMENSIONS	Window 5.20x1.60m.	
DESCRIPTION	Four-sash sweep window, made up of 2,8mm thick UPVC/PVC frame and profiles.	
MATERIAL	FRAME	Movable and fixed frame in PVC and STEEL with a minimum thickness of 2,8mm.
	GLASS	Smoked clear tempered double glass with 4+12+6mm thickness, argon gas inside, UV transmission<20%, heat transfer coefficient U<0.60W/m2K.
FINISHING	Smooth finish in white color.	
THRESHOLD/SILL	In cement mortar at a line of 1: 2.5 with 30mm thickness, executed on site.	
IRONWARE	HINGES	According to the specified series.
	LOCK	According to the specified series.
	HANDLES	According to the specified series.
OBSERVATIONS	All dimensions must be verified on site.	

JAD4	3 Pieces	
------	----------	--

Elevation

plan

Section. a-a

LOCATION	Coffe and Restaurant, General Store, Cold Store		
DIMENSIONS	Window 4,50x1,60m		
DESCRIPTION	Window opening with four sweeping sashes and one fixed sash, made up of 2,8mm thick UPVC/PVC frame and profiles.		
MATERIAL	FRAME	Movable and fixed frame in PVC and STEEL with a minimum thickness of 2,8mm.	
	GLASS	Smoked clear tempered double glass with 6+12+6mm thickness, argon gas inside, UV transmission<20%, heat transfer coefficient U<0,60w/m2K.	
FINISHING	Smooth finish in white color.		
THRESHOLD/SILL	In cement mortar at a line of 1: 2,5 with 30mm thickness, executed on site.		
HONWARE	HINGES	According to the specified series.	
	LOCKS	According to the specified series.	
	HANDLES	According to the specified series.	
OBSERVATIONS	All dimensions must be verified on site.		

LOCATION	Secretary	
DIMENSIONS	Window 5,30x1,60m.	
DESCRIPTION	Four-pane sliding sash window with 2,8mm thick UPVC/PVC frame and profiles.	
MATERIAL	FRAME	Movable and fixed frame in PVC and STEEL with a minimum thickness of 2,8mm.
	GLASS	Smoked clear tempered double glass with 6+12+6mm thickness, argon gas inside, UV transmission $\leq 20\%$, heat transfer coefficient $U \leq 0,60 \text{ w/m}^2\text{K}$.
FINISHING	Smooth finish in white color.	
THRESHOLD/SILL	In cement mortar at a line of 1: 2,5 with 30mm thickness, executed on site.	
HORIZONTAL LOCK HANDLES	HINGES	According to the specified series.
	LOCK	According to the specified series.
	HANDLES	According to the specified series.
OBSERVATIONS	All dimensions must be verified on site.	