

SECTION B - B'  
SCALE:1/25

#### EQUIPMENT LEGEND


**Eq01** - Washbasin tap.  
**Eq02** - Shower.  
**Eq03** - White ceramic washbasin.  
**Eq04** - White ceramic toilet.  
**Eq05** - White ceramic urinal.  
**Eq06** - Phenolic panels with 12mm thickness in Grey 0741.  
**Eq07** - Phenolic panels urinal divider.

**Eq08** - Mirror.  
**Eq09** - Plastic lockers.  
**Eq10** - Stainless steel sink.  
**Eq12** - Toilet for PMR sanitary installations.  
**Eq13** - Stainless steel support bar for PMR toilets.  
**Eq14** - Stainless steel support bar for PMR toilets.  
**Eq15** - Ceramic washbasin for PMR sanitary facilities.


**Eq17** - Stainless steel support bar for PMR toilets.  
**Eq23** - Toilet roll holder with lid.  
**Eq24** - Toilet brush and floor-mounted toilet brush holder.  
**Eq25** - 5L stainless steel trash can with lid.  
**Eq26** - Dishwasher.  
**Eq27** - Refrigerator with integrated freezer compartment.

**Eq22** - Space-saving siphon for 2 sinks.  
**Eq23** - Toilet roll holder with lid.  
**Eq24** - Toilet brush and floor-mounted toilet brush holder.  
**Eq25** - 5L stainless steel trash can with lid.  
**Eq26** - Dishwasher.  
**Eq27** - Refrigerator with integrated freezer compartment.


**Eq28** - Liquid soap dispenser.  
**Eq29** - Paper towel dispenser.  
**Eq30** - Automatic hand dryer in stainless steel.  
**Eq31** - PMR bathroom mirror.  
**Eq32** - Tap for PMR washbasins.  
**Eq33** - Microwave.

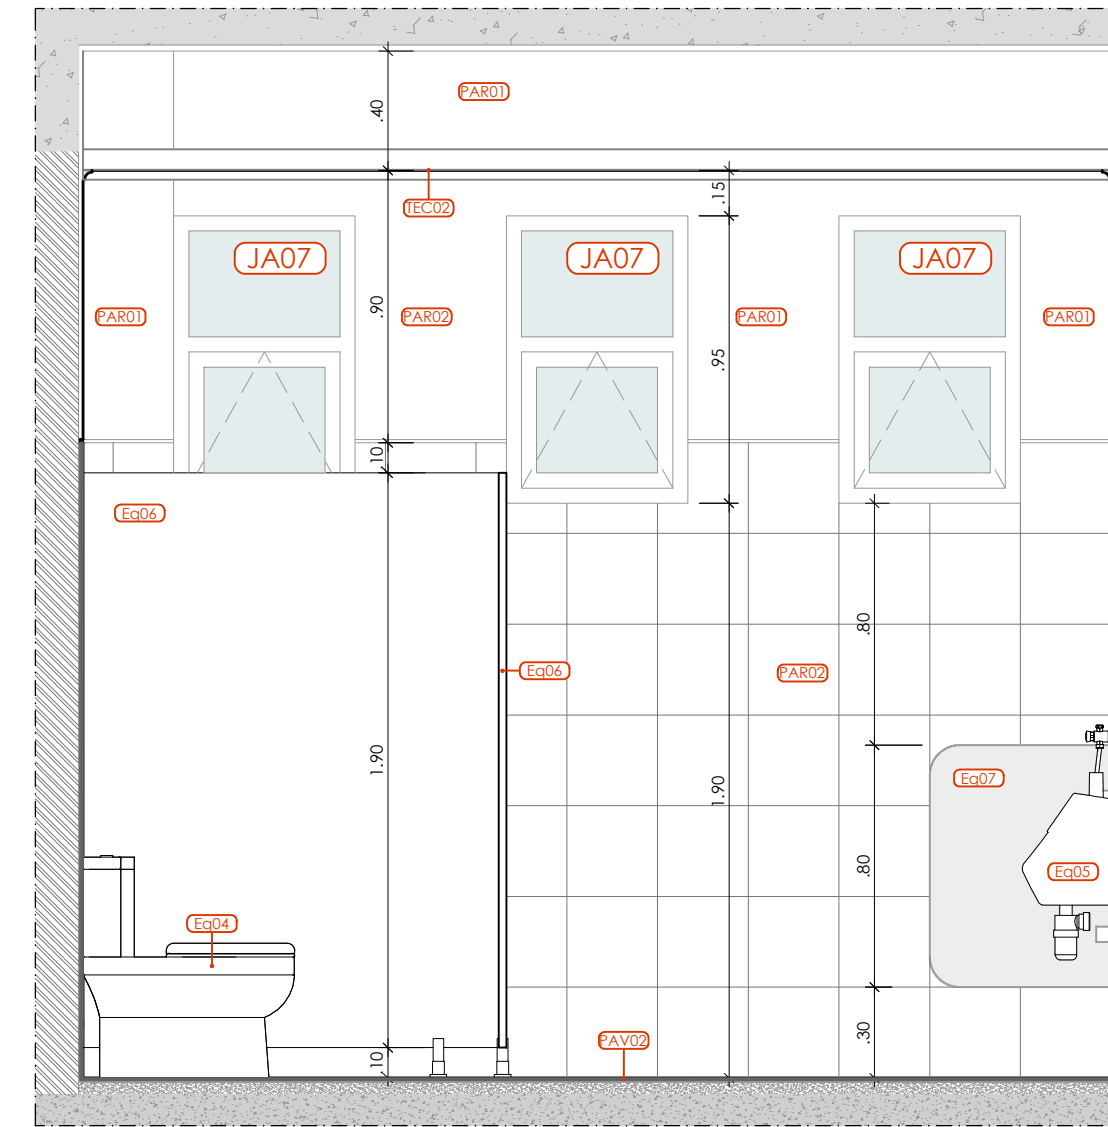

SECTION C - C'  
SCALE:1/25

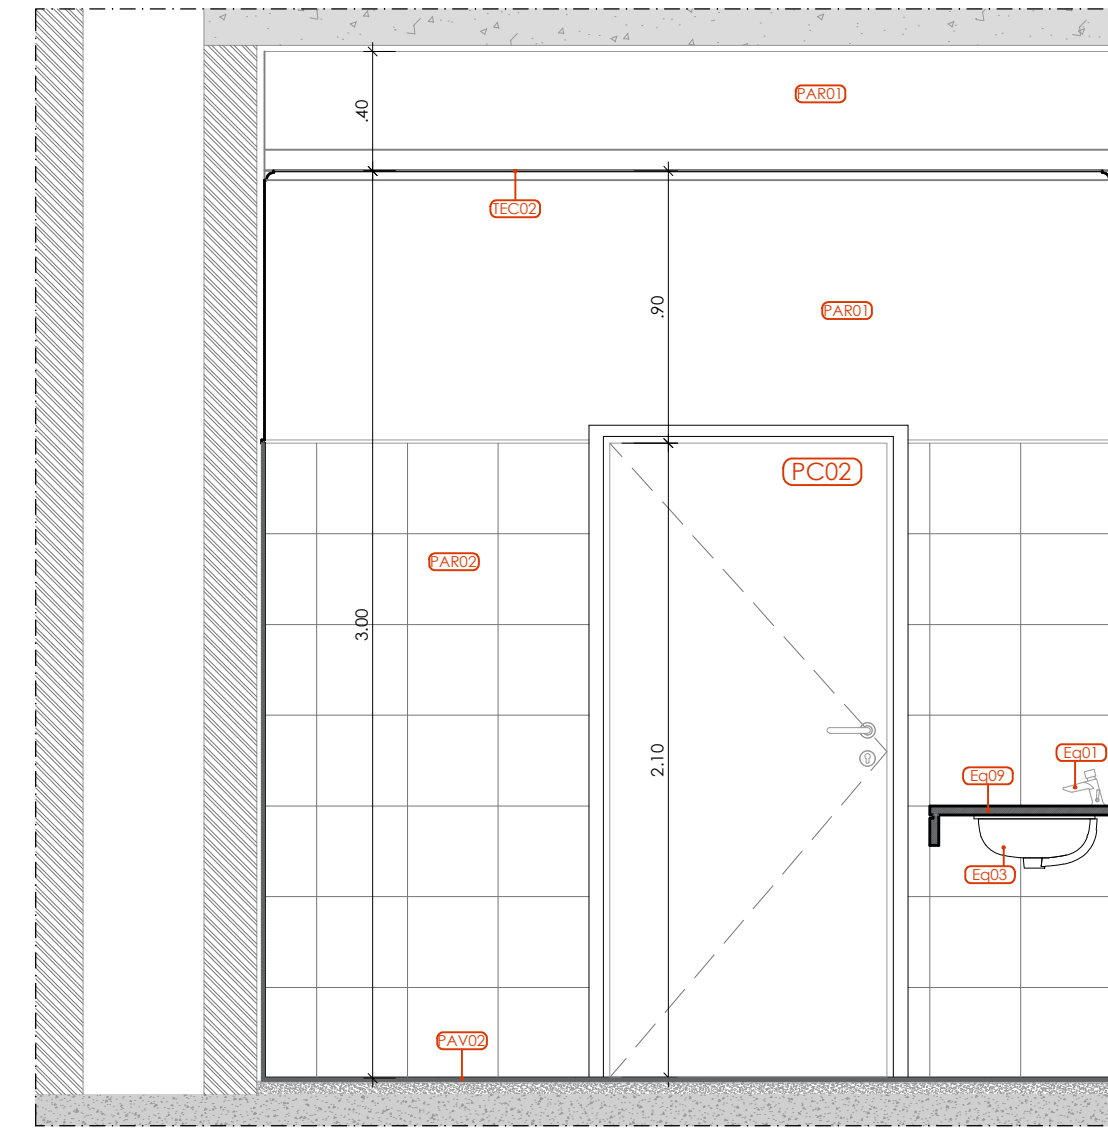

SECTION D - D'  
SCALE:1/25

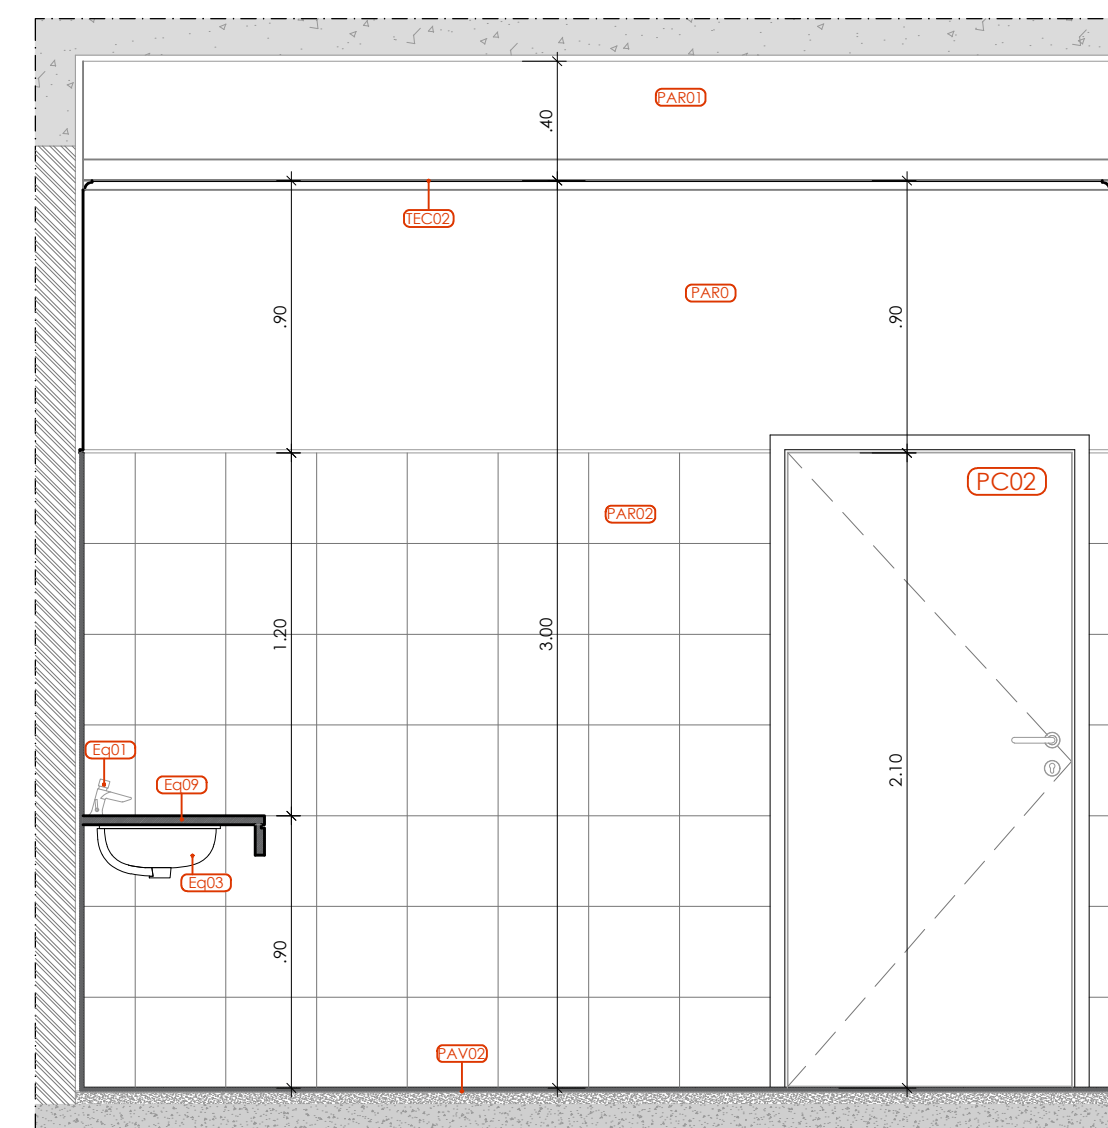

SECTION E - E'  
SCALE:1/25

#### MATERIALS LEGEND

**PAV 01** - 10mm thick porcelain tiles.  
**PAV 02** - Anti-slip porcelain tiles, 10mm thick.  
**PAV 03** - 10mm-thick porcelain tile laid in a 20mm  
**PAV 04** - 10 mm thick ceramic tile  
**PAV 05** - Anti-slip tiles 12 mm thick  
**PAV 06** - Anti-slip ceramic tiles 12 mm thick  
**PAV 07** - Interior floor in reinforced concrete with AQ50 mesh with a smooth finish, honed with a spoon/palustrade shore.  
**RDP01** - Veneered ceramic skirting 5 mm thick.

#### LEGEND FOR WALLS AND COVERINGS

**PAR 01** - Painted interior wall, to be plastered on two sides, 1:2 cement mortar 6 mm thick, well plastered, 1:3 cement mortar 9 mm thick, base wall (to be painted white, special interfacial agent, one coat).  
**PAR 02** - Interior wall clad with 10 mm thick tiles, applied on white 1:1 cement mortar with 4 mm thickness and 20% water content, (a cement paste bonding layer). Waterproof polymer cement coating 1.5 mm thick along the entire length, 9mm thick 1:3 cement mortar well compacted and plastered to be painted white with a special interfacial agent.  
**PAR 03** - Exterior wall painted white special interfacial agent.  
**PAR 04** - Exterior wall painted with a special interfacial agent.

#### CEILING LEGEND

**TEC 01** - Interior false ceiling in 12 mm thick ornamental plasterboard with self-tapping screws, opening filled with light steel beams (double layer); intervals between the main beams equal to 900-1000mm, intervals between the smaller beams equal to 600mm, intervals between the cross beams equal to 600mm. Reserve in the lower part of the frame Ø8 suspension bars, with an average bidirectional spacing of 900-1200.

**TEC 02** - Interior false ceiling in 2.5 mm thick aluminum alloy plate (PVC) fixed with self-tapping screws light steel beams (double layer); intervals between main beams equal to 900-1000mm, intervals between smaller beams equal to 600mm, intervals between transverse beams equal to 600mm reserve at the bottom of the frame Ø8 suspension bars, with an average bidirectional interval of 900-1200.

**TEC 03** - Painting of ceiling plastered with 1:3 cement mortar, 5mm thick, finned finish (slab moulded in situ).

#### STONWORK LEGEND

**SOL01** - Floor made of 1:2.5 cement mortar, 20 mm thick, well bonded and finished, cement mortar connecting one layer to the other, c12/15 concrete, 100 mm thick, simple soil compaction, 4% slope outwards.

**PEI 01** - Slab made of 1:2.5 cement mortar, 20 mm thick, well bonded and finished, cement mortar connecting one layer to the other, c12/15 concrete, 100 mm thick, simple soil compaction and 4% outward slope.

#### Engineer Approval Codes

Code Nr	Condition	Signature Employer's Representative	Date
Code 1			
Code 2			
Code 3			

00	First Submittals	07/09/2024	
REVISION	DESCRIPTION	DATE	CHECKED

EMPLOYER	 <b>Caioporto S.A.</b> Avenida Comandante Gika n°150 CP 1276 Sagrada Familia Luanda, Angola
EMPLOYER'S REPRESENTATIVE/ENGINEER	  Sellhorn Ingenieurgesellschaft mbH Teufeld 5, D-20459 Hamburg, Germany Tel: +49 (40) 36 12 01-0 Fax: +49 (40) 36 12 01-28 E-Mail: info@sellhorn-hamburg.de www.sellhorn-hamburg.de
CONSULTANT	  Sellhorn Ingenieurgesellschaft mbH Teufeld 5, D-20459 Hamburg, Germany Tel: +49 (40) 36 12 01-0 Fax: +49 (40) 36 12 01-28 E-Mail: info@sellhorn-hamburg.de www.sellhorn-hamburg.de
CONTRACTOR	 China Road and Bridge Corporation R. Fomao Mendes Pinto 55 Alvalade, Luanda, Angola Fax: +244 222 222 7003 http://www.crbc.com

The Project of the New Port of Caio in Cabinda

DRAWING TITLE  
**01\_One Stop Building**  
**Detail Zone 01\_Plan and Sections**

	DESIGNED BY	DRAWN BY	CHECKED BY	SCALE	DRAWING N°
DATE	20/01/2025	/ /2025	/ /2025	1:25	01.19
NAME					
DESIGN STAGE	FINAL DESIGN				