




EXTERIOR PLAN
SCALE:1/25

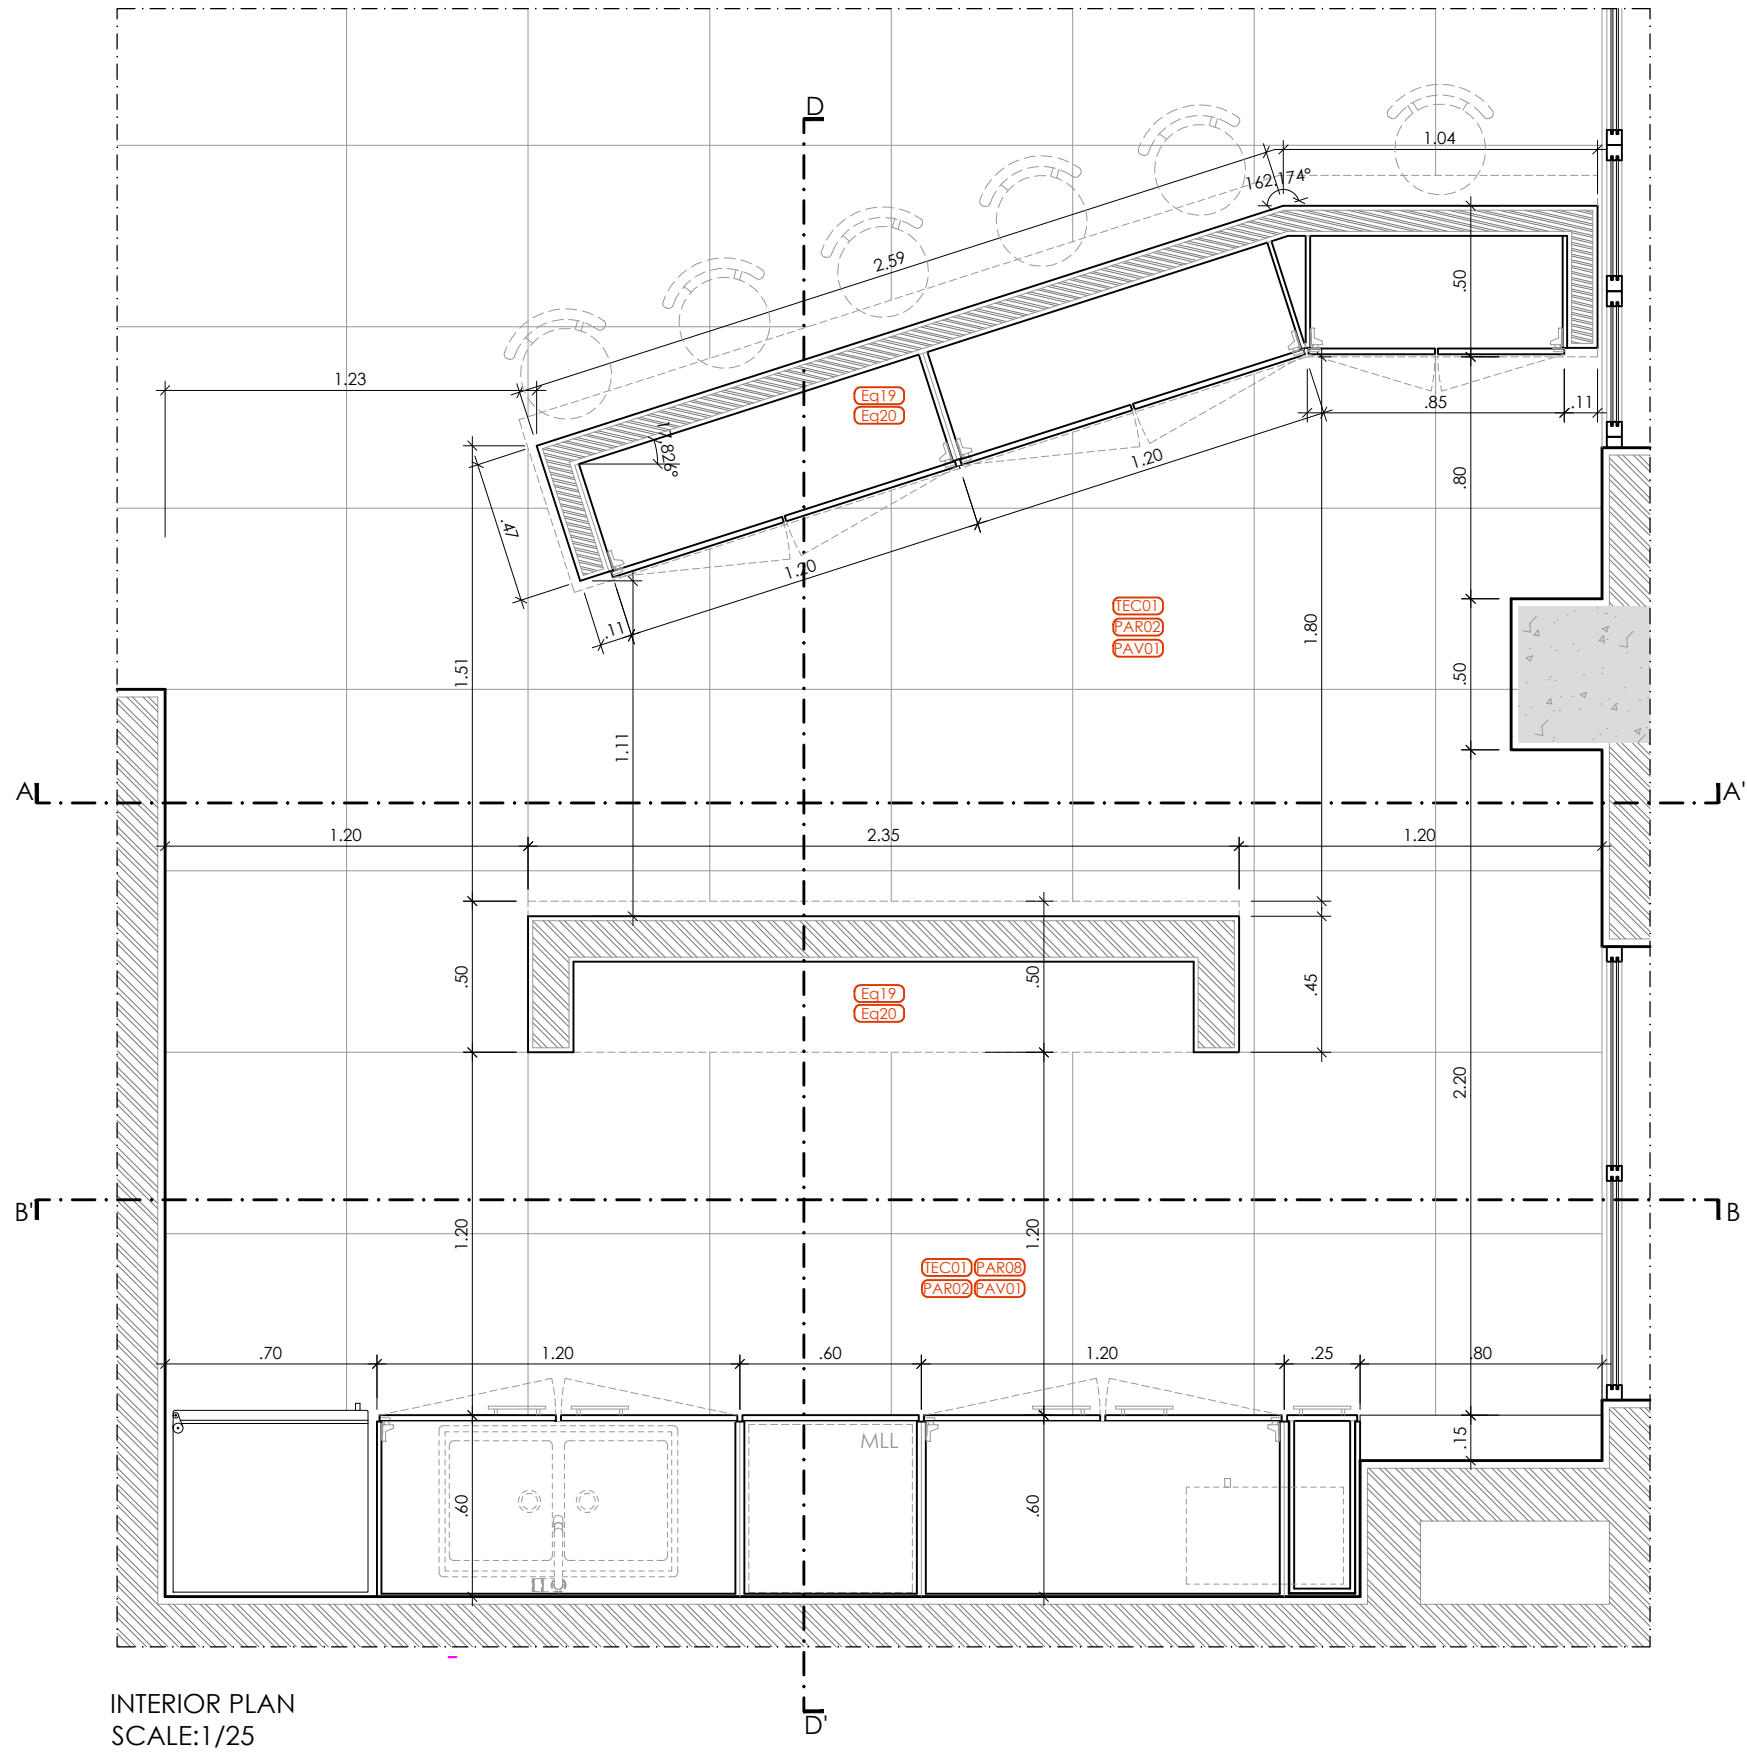


INTERIOR PLAN
SCALE:1/25

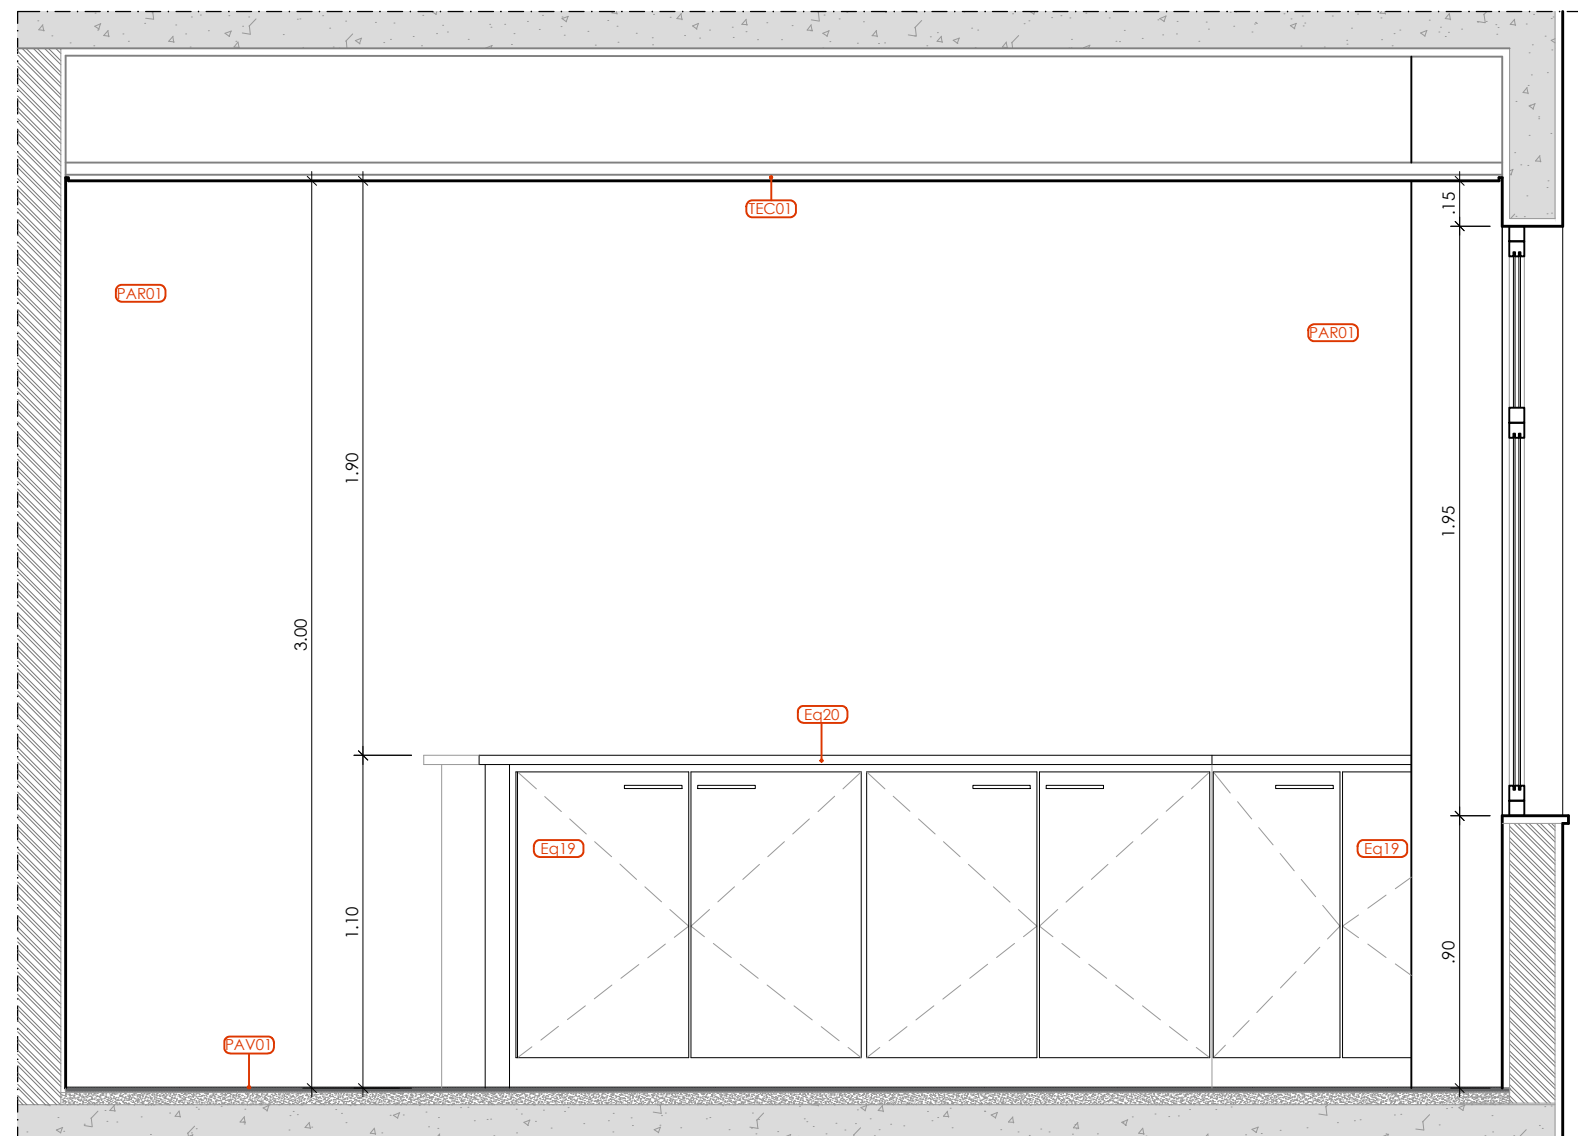

SECTION A - A'
SCALE:1/25

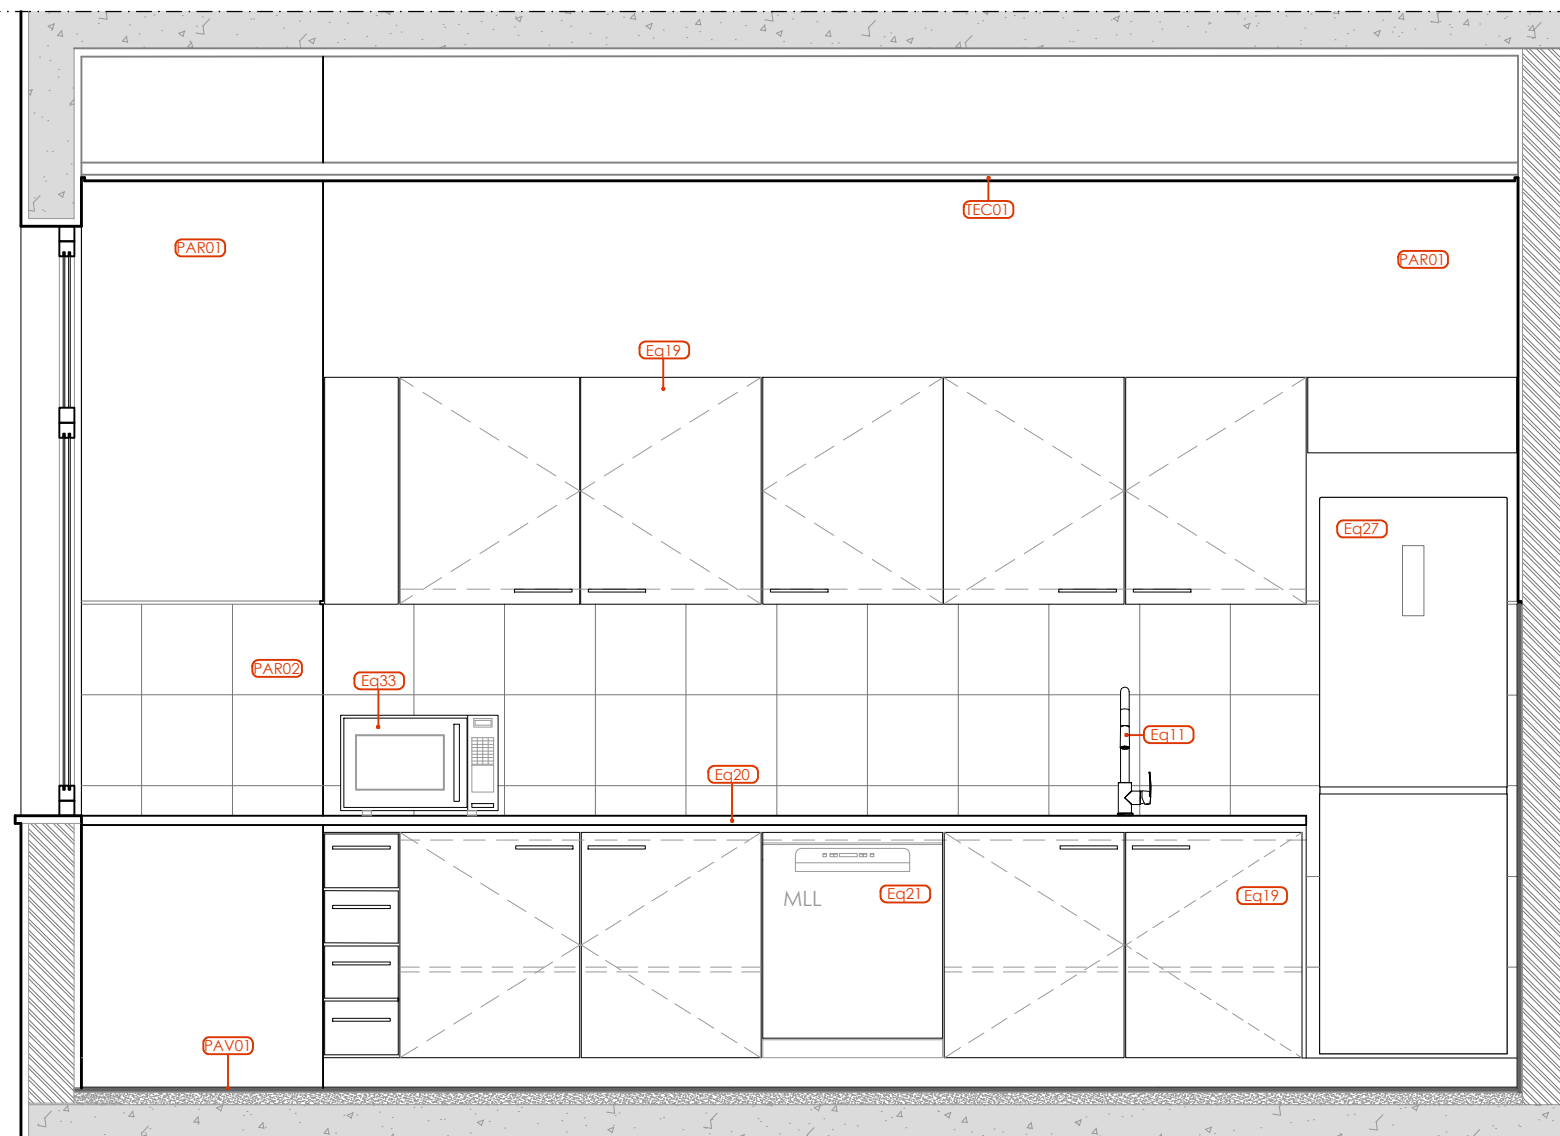

SECTION B - B'
SCALE:1/25

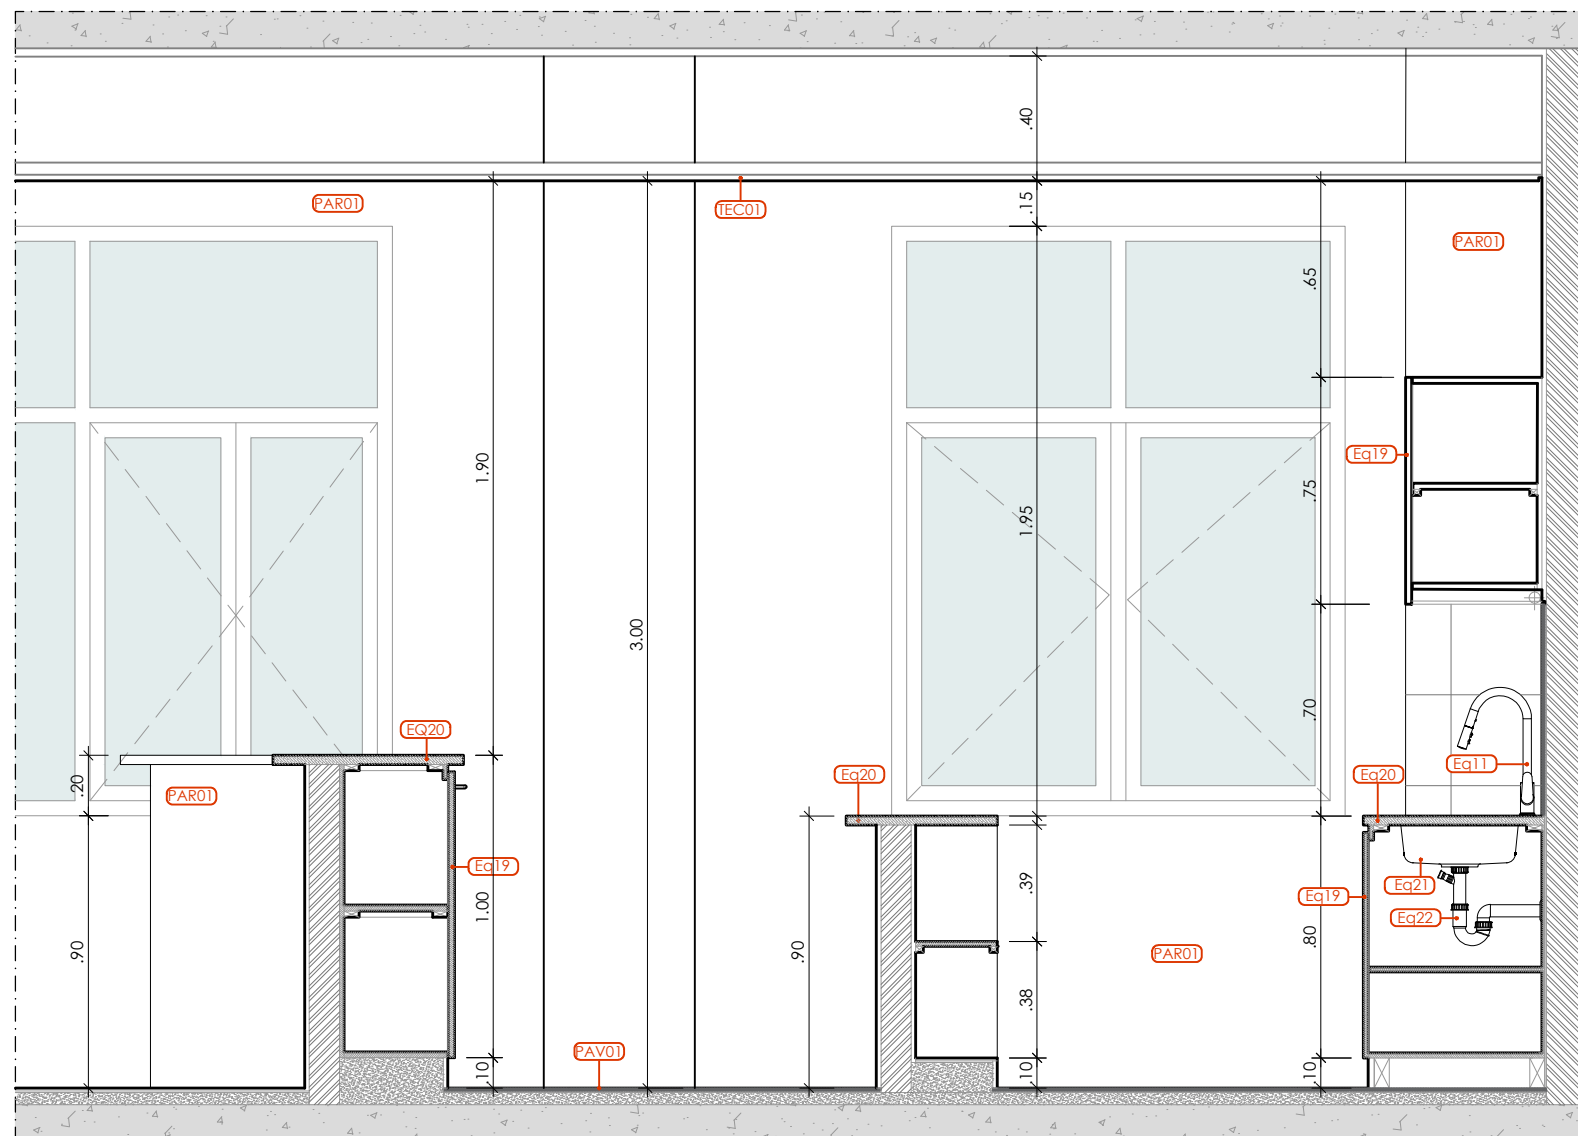

SECTION C - C'
SCALE:1/25

EQUIPMENT LEGEND

Eq01 - Washbasin tap.
Eq02 - Shower.
Eq03 - White ceramic washbasin.
Eq04 - White ceramic toilet.
Eq05 - White ceramic urinal.
Eq06 - Phenolic panels with 12mm thickness in Grey 0741.
Eq07 - Phenolic panels urinal divider.

Eq08 - Mirror.
Eq09 - Marble worktop.
Eq10 - Stainless steel sink.
Eq12 - Toilet for PMR sanitary installations.
Eq13 - Stainless steel support bar for PMR toilets.
Eq14 - Stainless steel support bar for PMR toilets.
Eq15 - Ceramic washbasin for PMR sanitary facilities.

Eq17 - Stainless steel support bar for PMR toilets.
Eq18 - Plastic lockers.
Eq19 - Integrated finish cabinet and door panel, with medium density fiberboard as principal material, premium baking varnish board as surface veneer.
Eq20 - Integrated cabinet countertop, with medium density fiberboard as principal material, PVC applied as surface veneer.
Eq21 - Stainless steel dishwasher with 2 bowls.

Eq22 - Space-saving siphon for 2 sinks.
Eq23 - Toilet roll holder with lid.
Eq24 - Toilet brush and floor-mounted toilet brush holder.
Eq25 - SL stainless steel trash can with lid.
Eq26 - Dishwasher.
Eq27 - Refrigerator with integrated freezer compartment.

Eq28 - Liquid soap dispenser.
Eq29 - Paper towel dispenser.
Eq30 - Automatic hand dryer in stainless steel.
Eq31 - PMR bathroom mirror.
Eq32 - Tap for PMR washbasins.
Eq33 - Microwave .

MATERIALS LEGEND

PAV 01 - 10mm thick porcelain tiles.
PAV 02 - Anti-slip porcelain tiles, 10mm thick.
PAV 03 - 10mm-thick porcelain tile laid in a 20mm
PAV 04 - 10 mm thick ceramic tile
PAV 05 - Anti-slip tiles 12 mm thick
PAV 06 - Anti-slip ceramic tiles 12 mm thick
PAV 07 - Concrete paving slabs, 45cmx45cm, on a flat slab with mechanical protection and a layer of cement mortar made on site, to the tune of 1:6 with a slope of 1‰ to 5‰ (see hydraulic project).
PAV 08 - Interior floor in reinforced concrete with AQ50 mesh with a smooth finish, honed with a spoon/palustrade shore.
RDP01 - Veneered ceramic skirting 5 mm thick.

WALLS AND COVERINGS

PAR 01 - Painted interior wall, to be plastered on two sides, 1:2 cement mortar 6 mm thick, well plastered, 1:3 cement mortar 9 mm thick. Base wall (to be painted white, special interfacial agent, one coat).
PAR 02 - Interior wall clad with 10 mm thick tiles, applied on white 1:1 cement mortar with 4 mm thickness and 20% water content, (a cement paste bonding layer). Waterproof polymer cement coating 1.5 mm thick along the entire length; 9mm thick 1:3 cement mortar well compacted and plastered to be painted white with a special interfacial agent.
PAR 03 - Exterior wall painted white special interfacial agent.
PAR 04 - Exterior wall painted with a special interfacial agent.

CEILING LEGEND

TEC 01 - Interior false ceiling in 12 mm thick ornamental plasterboard with self-tapping screws, opening filled with light steel beams (double layer), intervals between the main beams equal to 900-1000mm, intervals between the smaller beams equal to 600mm, intervals between the cross beams equal to 400mm.
TEC 02 - Interior false ceiling in 2.5 mm thick aluminum alloy plate (PVC) fixed with self-tapping screws light steel beams (double layer); intervals between main beams equal to 900-1000mm, intervals between smaller beams equal to 400mm, intervals between transverse beams equal to 400mm reserve at the bottom of the frame 8 suspension bars, with an average bidirectional interval of 900-1200.
TEC 03 - Painting of ceiling plastered with 1:3 cement mortar, 5mm thick, finned finish (slab moulded in situ).

STONEWORK LEGEND



SOL 01 - Floor made of 1:2.5 cement mortar, 20 mm thick, well bonded and finished, cement mortar connecting one layer to the other, c12/15 concrete, 100 mm thick, simple soil compaction, 4% slope outwards.
PEI 01 - Sill made of 1:2.5 cement mortar, 20 mm thick, well bonded and finished, cement mortar connecting one layer to the other, c12/15 concrete, 100 mm thick, simple soil compaction and 4% outward slope.



Engineer Approval Codes

Code Nr	Condition	Signature Employer's Representative	Date
Code 1			
Code 2			
Code 3			

00	First Submittals	07/09/2024	
REVISION	DESCRIPTION	DATE	CHECKED

EMPLOYER	 Porto de Caio Cabinda	Caioporto S.A. Avenida Comandante Gika n° 150 CP 1276 Sagrada Familia Luanda, Angola
----------	---	--

EMPLOYER'S REPRESENTATIVE/ENGINEER	 Sellhorn INGENIEURGESELLSCHAFT	 HPC	Sellhorn Ingenieurgesellschaft mbH Telfeld 5, D-20459 Hamburg, Germany Tel: +49 (40) 36 12 01-0 Fax: +49 (40) 36 12 01-28 E-Mail: info@sellhorn-hamburg.de www.sellhorn-hamburg.de
------------------------------------	---	---	---

CONSULTANT	 Sellhorn INGENIEURGESELLSCHAFT	 HPC	Sellhorn Ingenieurgesellschaft mbH Telfeld 5, D-20459 Hamburg, Germany Tel: +49 (40) 36 12 01-0 Fax: +49 (40) 36 12 01-28 E-Mail: info@sellhorn-hamburg.de www.sellhorn-hamburg.de
------------	---	---	---

CONTRACTOR	 RB	China Road and Bridge Corporation R. Ferno Mendes Pinto 55 Alvalade, Luanda, Angola Fax: +244 22 232 7003 http://www.crbcc.com/
------------	--	---

PROJECT	The Project of the New Port of Caio in Cabinda
---------	---

DRAWING TITLE	1015 One Stop Building Detail Zone 03_Kitchenette
---------------	--

DESIGNED BY	DRAWN BY	CHECKED BY	SCALE	DRAWING N°
DATE	20/01/2025	/ / 2025	/ / 2025	
NAME				
DESIGN STAGE	FINAL DESIGN			